


TYPE FC FLEXIBLE CONNECTORS

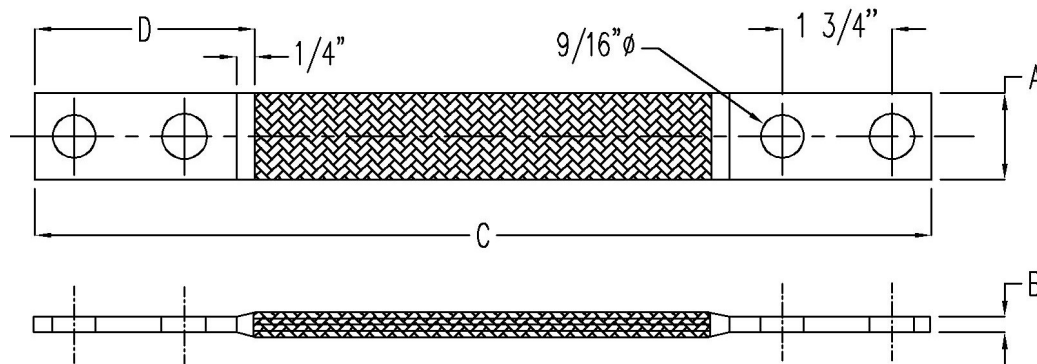

CATALOG NUMBER	AMPERE RATING	NUMBER & SIZE OF BRAID	DIMENSIONS IN INCHES*			
			A	B	C	D
7312	200	1 – 76800 CM	1	$\frac{1}{8}$	12	3
7313	350	2 – 76800 CM	1	$\frac{1}{4}$	12	3
15841	400	3 – 76800 CM	1	$\frac{5}{16}$	12	3
7314	450	1 – 302400 CM	1 ½	$\frac{5}{16}$	12	3 ½
7315	550	1 – 76800 CM 1 – 302400 CM	1 ½	$\frac{3}{8}$	12	3 ½
15842	650	2 – 76800 CM 1 – 302400 CM	1 ½	$\frac{13}{32}$	12	3 ½
15843	750	3 – 76800 CM 1 – 302400 CM	1 ½	$\frac{7}{16}$	12	3 ½
73 17	800	2 – 302400 CM	1 ½	$\frac{1}{2}$	12	3 ½
15844	900	2 – 76800 CM 2 – 302400 CM	1 ½	$\frac{5}{8}$	12	3 ½
15845**	1000	3 – 302400 CM	1 ½	$\frac{13}{16}$	12	3 ½
15846***	1200	4 – 302400 CM	1 ½	1	12	3 ½

*Standard dimensions shown. Custom units also available.

**Catalog # 15845 consists of (1) # 7314 & (1) # 7317.

***Catalog # 15846 consists of (2) # 7317.

- Flexible connectors will carry rated capacity indoors. For outdoor applications, rated capacity increases.
- Braid is tinned before stranding. Untinned also available.
- Ferrules are completely tin plated.
- Standard ferrules shown. Custom ferrules available, consult factory.



MANUFACTURER OF HIGH VOLTAGE PRODUCTS SINCE 1914
1.800.426.4380

Page intentionally left blank